

## SIGMA SECURE

**Blown machine film delivers maximum containment force** and puncture resistance for heavy, high-risk loads.


**Superior bonding between film layers** reduces tailing.

**Reliable performance** in extreme cold, dusty, or outdoor conditions.

**Ideal for heavy, challenging C-type loads.**

**Applications include:** heavy bagged products, magazines and papers, roofing materials, liquids, high containment applications, unstable B/C load profiles, cold environments, irregular shaped loads, heavy weight loads, brick and block, and large/heavy bagged items.

SIGMA  
**SECURE**

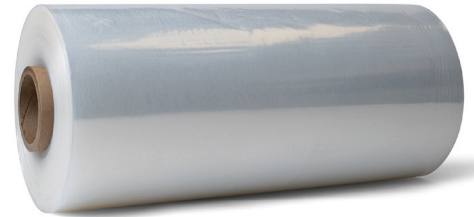

Product	Length	Gauge	Roll Weight (LBS)	Rolls/Pallet
<b>20 INCH</b>				
MPB2040120	4,000'	120	38.4	40
MPB2044100	4,400'	100	35.2	40
MPB205090	5,000'	90	36.0	40
MPB205080	5,000'	80	32.0	40
MPB206080	6,000'	80	38.4	40
MPB206070	6,000'	70	33.6	40

*All Sigma Stretch Film products are fully recyclable through proper channels.  
We are proud to be a Certified Minority Owned Company within the Sigma Plastics Group.*