



## SIGMA SECURE

**Blown machine film delivers maximum containment force** and puncture resistance for heavy, high-risk loads.


**Superior bonding between film layers** reduces tailing.

**Reliable performance** in extreme cold, dusty, or outdoor conditions.

**Ideal for heavy, challenging C-type loads.**

**Applications include:** heavy bagged products, magazines and papers, roofing materials, liquids, high containment applications, unstable B/C load profiles, cold environments, irregular shaped loads, heavy weight loads, brick and block, and large/heavy bagged items.

SIGMA  
**SECURE**

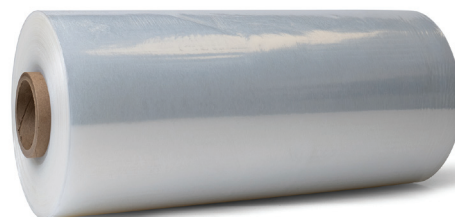

Product	Length	Gauge	Roll Weight (LBS)	Rolls/Pallet
20 INCH				
MPB2040120	4,000'	120	38.4	40
MPB2044100	4,400'	100	35.2	40
MPB205090	5,000'	90	36.0	40
MPB205080	5,000'	80	32.0	40
MPB206080	6,000'	80	38.4	40
MPB206070	6,000'	70	33.6	40

*All Sigma Stretch Film products are fully recyclable through proper channels.  
We are proud to be a Certified Minority Owned Company within the Sigma Plastics Group.*

