


SIGMA VORTEX

High-durability multi-layer blown film built for demanding, high-speed applications.

Stiff formula with strong puncture resistance secures heavy, hard-to-wrap A, B, and C loads.

Opportunity to reduce film thickness while increasing containment.

One-sided cling eliminates unwanted adhesion, ensuring efficient storage and transport.

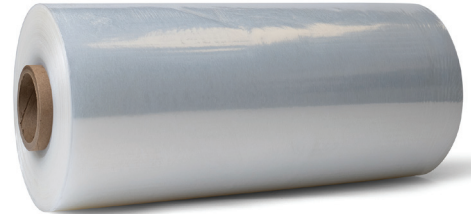

| Product | Length (m) | Gauge | Roll Weight (LBS) | Rolls/Pallet |
|--------------|------------|-------|-------------------|--------------|
| 500mm | | | | |
| MVT5001230 | 1220 | 120 | 37.8 | 40 |
| MVT5001425 | 1430 | 100 | 37.0 | 40 |
| MVT5001523 | 1525 | 90 | 35.5 | 40 |
| MVT5001820 | 1830 | 80 | 37.8 | 40 |
| MVT5001917 | 1980 | 70 | 35.8 | 40 |
| 750mm | | | | |
| MVT7501230 | 1220 | 120 | 56.7 | 20 |
| MVT7501425 | 1430 | 100 | 55.3 | 20 |
| MVT7501523 | 1525 | 90 | 53.1 | 20 |
| MVT7501820 | 1830 | 80 | 56.7 | 20 |
| MVT7501917 | 1980 | 70 | 53.6 | 20 |

*All Sigma Stretch Film products are fully recyclable through proper channels.
We are proud to be a Certified Minority Owned Company within the Sigma Plastics Group.*

