

SIGMA SUMMIT


Sigma's best-selling high-performance one-sided cling cast machine film.

Engineered for high-speed applications.

Suitable for various wrapping needs, including A, B, and C loads.

One-sided cling eliminates unwanted adhesion, ensuring efficient storage and transport.

Applications include: bagged and boxed products, fully automatic equipment, bundling applications, high-speed overhead equipment, loads requiring OSC and film clarity, A, B, and C-load profiles, inboard/outboard loads, distribution center mixed pallets, light to heavy weight containers.

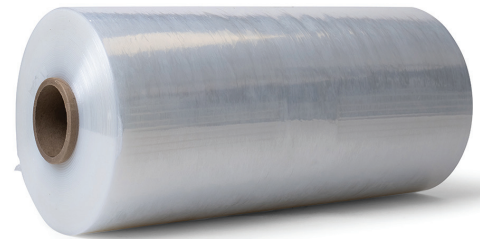

Product	Length	Gauge	Roll Weight (LBS)	Rolls/Pallet
18 INCH				
MIT186080	6,000'	80	34.6	40
MIT186070	6,000'	70	30.2	40
20 INCH				
MIT2045105	4,500'	105	37.8	40
MIT205090	5,000'	90	36.0	40
MIT206080	6,000'	80	38.4	40
MIT206070	6,000'	70	33.6	40
MIT206063	6,000'	63	30.2	40
MIT207263	7,250'	63	36.5	40
MIT207065	7,000'	65	36.4	40
MIT205063S50	5,000'	63	25.2	50
MIT204555S60	4,500'	55	19.8	60
MIT208055	8,000'	55	35.2	40
30 INCH				
MIT305090	5,000'	90	54.0	20
MIT306080	6,000'	80	57.6	20
MIT306070	6,000'	70	50.4	20
MIT307065	7,000'	65	54.6	20
MIT305063S25	5,000'	63	37.8	25
MIT308055	8,000'	55	52.8	20

All Sigma Stretch Film products are fully recyclable through proper channels.
We are proud to be a Certified Minority Owned Company within the Sigma Plastics Group.

