

MEV ONE-SIDED CLING CAST MACHINE FILM


.80 mil

Product Description

Evolve is Sigma's highest performance one-sided cling cast machine film designed for high-speed, challenging applications. Polypropylene enhanced formulation engineered to minimize tears and puncture propagation. One-sided cling allows side-by-side storage without pallet-to-pallet adhesion, preventing pallets from adhering together during storage and transportation. Evolve has perfect roll edge profiles and gauge consistency. Available in 500mm and 750mm widths.

Applications

High volume
High-speed wrapping
One-sided cling required
Inboard loads

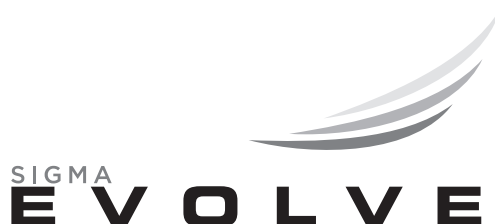

Film Properties	Typical Value (English)	Tolerance	Test Method
Tensile Strength at Yield MD	N/A	N/A	N/A
Tensile Strength at Yield TD	2300 psi	± 15%	ASTM D882
Tensile Strength at Break MD	3700 psi	± 15%	ASTM D882
Tensile Strength at Break TD	6000 psi	± 15%	ASTM D882
Elongation at Break MD	525%	± 15%	ASTM D882
Elongation at Break TD	650%	± 15%	ASTM D882
Protrusion Puncture	6.0 lbs.	± 15%	ASTM D5748
Protrusion Puncture Energy	16.0 in-lb	± 15%	ASTM D5748
Elmendorf Tear Strength MD	650 g/mil	± 15%	ASTM 1922
Elmendorf Tear Strength TD	970 g/mil	± 15%	ASTM 1922
Cling - Outside to Inside @ 225%	min 150 g/in	± 15%	ASTM D5458

Dimensions	Value	Tolerance
Core ID	3.05 inches	± 0.05%
Film Thickness	20.3 micron	

**Manufactured with pride in the USA and Canada by
Sigma Stretch Film**

Page & Schuyler Aves. Bldg #8
Phone: 800-672-9727 • 201-507-9100
Email: stretch.info@sigmaplastics.com
Visit our website at www.sigmastretchfilm.com
©Copyright 2018 Sigma Stretch Film